

# Emergency Exit Sign Lighting



## Version „BALU“



### Emergency Exit Sign Lighting Version „BALU“

**Surface mounted lamp  
recessed  
Central battery system**

**Recognition distance:**

- 20 m
- 30 m

### Specification


Version	BALU – ball impact resistant
Recognition distance	20 m / 30 m
Mounting	Surfaced mounted recessed
Light source	2 x 3 W LED
Power	24V with monitoring single lamps 6,0 W 230V with monitoring single lamps 8,0 VA 230V without monitoring single lamps 7,1 VA
Ambient temperature	-10 °C - +40 °C
IP class	IP 30
Protection class	I
Housing	Steel sheet galvanised
Weight	1,0 Kg / 1,6 Kg
Dimension (l x w x h) (20 m / 30 m)	160 x 260 x 73 mm / 210 x 360 x 73 mm
Pictogram	Pictogram set according to DIN 4844 ( ← / ↓ / → )
Luminance	Limit of luminance of 500 cd/m <sup>2</sup> according to DIN 4844-1 is clearly exceeded in mains operation. The luminance in emergency operation is higher than required by DIN EN 1838.
Terminal	WAGO Lighting connector 2,5 mm <sup>2</sup>

### Order information


		Standard	
<b>24 V with monitoring single lamps</b>	<b>20m</b>	<b>750100 – BA/Z-24/20/X/W/8</b>	
	<b>30m</b>	<b>750110 – BA/Z-24/30/X/W/8</b>	
<b>230 V with monitoring single lamps</b>	<b>20m</b>	<b>750200 – BA/Z/20/X/W/8</b>	
	<b>30m</b>	<b>750210 – BA/Z30/X/W/8</b>	
<b>230 V without monitoring single lamps</b>	<b>20m</b>	<b>750300 – BA/Z/20/X/W/N</b>	
	<b>30m</b>	<b>750310 – OM/Z/30/X/W/N</b>	

## Dimension

### Recognition distance: 20 m

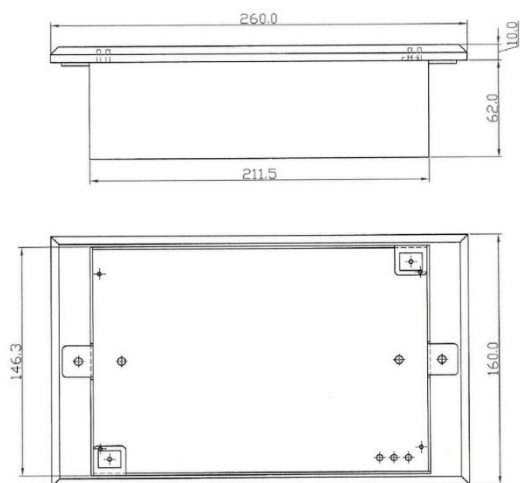

### Recognition distance: 30 m

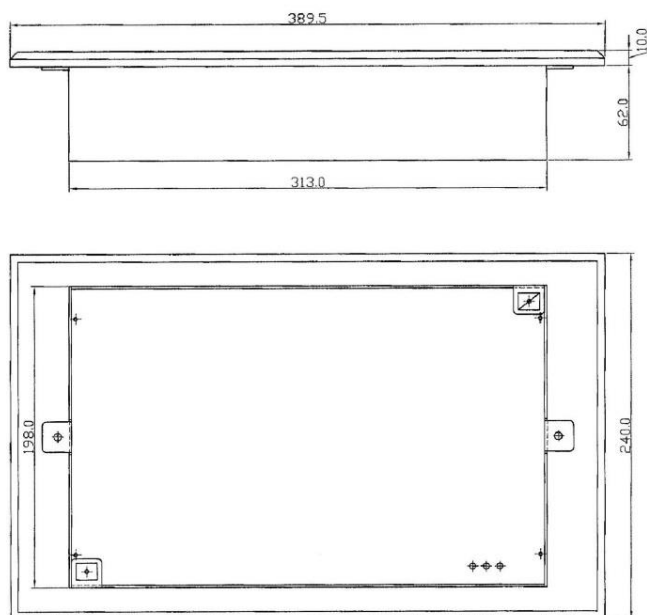

## Installation

See document „Installation instruction Emergency exit sign lighting version BALU“

### Forchheim und Willing GmbH

Südstraße 21  
09221 Neukirchen / Erzgebirge - Germany

Phone: 0049 371 27816-0  
Fax: 0049 371 27816-29  
E-Mail: [info@forchheim-willing.de](mailto:info@forchheim-willing.de)  
Internet: [www.forchheim-willing.de](http://www.forchheim-willing.de)