

Emergency escape lighting Version „KAPPA“



Emergency escape lighting Version „KAPPA“

**Surface mounted lamp
Central battery system**

Luminous intensity distribution:

Anti-panic lighting


Specification

| | | |
|-----------------------|---|--------|
| Version | KAPPA | |
| Light distribution | Symmetric (Please ask for: Isolux diagram / EULUMDAT-data) | |
| Mounting | Surface mounted | |
| Light source | 2 x 3 W LED | |
| Power | 24 V with Monitoring single lamps | 6,0 W |
| | 230 V with Monitoring single lamps | 8,0 VA |
| | 230 V without Monitoring single lamps | 7,1 VA |
| Ambient temperature | -10 °C - +40 °C | |
| IP class | IP 30 | |
| Protection class | I for 230 V III for 24 V | |
| Housing | Steel sheet coloured, standard colour RAL 9010 (white) | |
| LED-Panel | Steel sheet coloured, standard colour RAL 9005 (black) | |
| Weight | ca. 1,6 kg | |
| Dimension (w x l x h) | 180mm x 240mm x 60 mm | |
| Terminal | WAGO Lighting connector 2,5 mm ² | |

Order information

| | Standard RAL 9010 | Special colour: Y = RAL colour |
|--|--------------------------------|------------------------------------|
| 24 V with Monitoring single lamps | 752155 – KP/Z-24/S/Z/DA | 752165 – KP/Z-24/S/Y/DA/RAL |
| 230 V with Monitoring single lamps | 752135 – KP/Z/S/Z/DA/08 | 752145 – KP/Z/S/Y/DA/08/RAL |
| 230 V without Monitoring single lamps | 752115 – KP/Z/S/Z/DA/N | 752125 – KP/Z/S/Y/DA/N/RAL |

Dimension

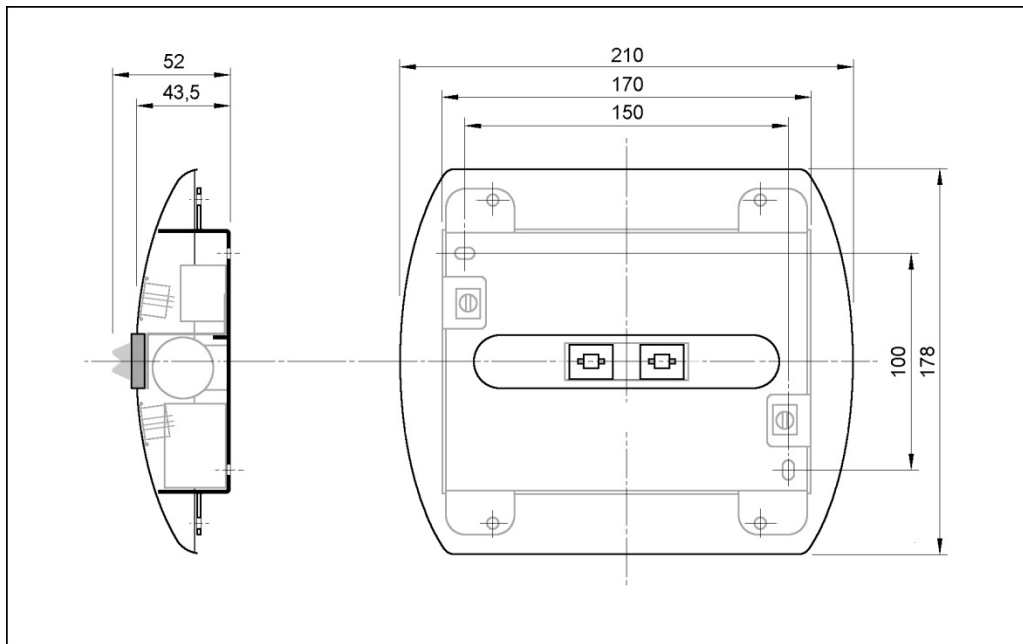

Installation

See document „Installation instruction Emergency escape lighting version KAPPA surface mounted“.

Forchheim und Willing GmbH

Südstraße 21
09221 Neukirchen / Erzgebirge - Germany

Phone: 0049 371 27816-0
Fax: 0049 371 27816-29
E-Mail: info@forchheim-willing.de
Internet: www.forchheim-willing.de