

# Emergency escape lighting Version „KAPPA“



## Emergency escape lighting Version „KAPPA“

**Surface mounted lamp  
Central battery system**

**Luminous intensity distribution:**

**Escape route lighting**


### Specification

Version	KAPPA	
Light distribution	Asymmetric (Please ask for: Isolux diagram / EULUMDAT-data)	
Mounting	Surface mounted	
Light source	2 x 3 W LED	
Power	24 V with monitoring single lamps	6,0 W
	230 V with monitoring single lamps	8,0 VA
	230 V without monitoring single lamps	7,1 VA
Ambient temperature	-10 °C - +40 °C	
IP class	IP 30	
Protection class	I for 230 V III for 24 V	
Housing	Steel sheet coloured, standard colour RAL 9010 (white)	
LED-Panel	Steel sheet coloured, standard colour RAL 9005 (black)	
Weight	ca. 1,6 kg	
Dimension (l x w x h)	180mm x 240mm x 60 mm	
Terminal	WAGO Lighting connector 2,5 mm <sup>2</sup>	

### Order information

	Standard colour RAL 9010	Special colour: Y = RAL colour
<b>24 V with monitoring single lamps</b>	<b>752150 – KP/Z-24/A/Z/DA</b>	<b>752160 – KP/Z-24/Y/Z/DA/RAL</b>
<b>230 V with monitoring single lamps</b>	<b>752130 – KP/Z/A/Z/DA/08</b>	<b>752140 – KP/Z/A/Y/DA/08/RAL</b>
<b>230 V without monitoring single lamps</b>	<b>752110 – KP/Z/A/Z/DA/N</b>	<b>752120 – KP/Z/A/Y/DA/N/RAL</b>

## Dimension

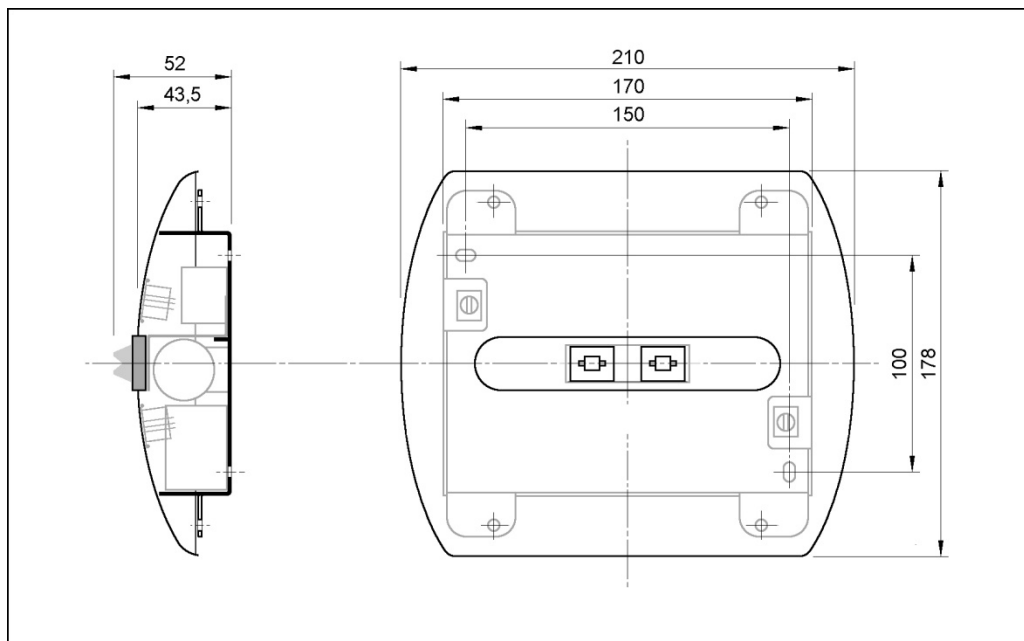

## Installation

See document „Installation instruction Emergency escape lighting version KAPPA surface mounted“.

### **Forchheim und Willing GmbH**

Südstraße 21  
09221 Neukirchen / Erzgebirge - Germany

Phone: 0049 371 27816-0  
Fax: 0049 371 27816-29  
E-Mail: [info@forchheim-willing.de](mailto:info@forchheim-willing.de)  
Internet: [www.forchheim-willing.de](http://www.forchheim-willing.de)