

Emergency Exit Sign Lighting

Version „OMEGA“



Emergency Exit Sign Lighting Version „OMEGA“

**Pendant suspension lamp
Central battery system**

Recognition distance:

- **20 m**
- **30 m**



Specification

Version	OMEGA
Recognition distance	20 m / 30 m
Mounting	Pendant suspended
Light source	2 x 3 W LED
Power	24V with monitoring single lamps 6,0 W 230V with monitoring single lamps 8,0 VA 230V without monitoring single lamps 7,1 VA
Ambient temperature	-10 °C - +40 °C
IP class	IP 30
Protection class	I for 230 V III for 24 V
Housing	Aluminium profile, steel sheet coloured
Weight	ca. 1,1 kg / 1,4 kg
Dimension (l x w x h) (20 m/30 m)	133 x 216 x 78 mm / 193 x 316 x 84 mm
Pendulum	500 mm chrome-plated
Pictogram	Pictogram set according to DIN 4844 (← / ↓ / →)
Luminance	Limit of luminance of 500 cd/m ² according to DIN 4844-1 is clearly exceeded in mains operation. The luminance in emergency operation is higher than required by DIN EN 1838.
Terminal	Cable end of pendant suspension to connect with lighting connector
Special option	Special pictograms optionally

Order information

		X=Standard: Alu natural	Special colour: Y = RAL colour
24 V with monitoring single lamps	20 m	711730-OM/Z24/20/X/P/8/LU	711780 - OM/Z24/20/Y/P/8/LU
	30 m	722530-OM/Z24/30/X/P/8/LU	722580 - OM/Z24/30/Y/P/8/LU
230 V with monitoring single lamps	20 m	711620 - OM/Z/20/X/P/8/LU	711680 - OM/Z/20/Y/P/8/LU
	30 m	722380 - OM/Z/30/X/P/8/LU	722330 - OM/Z/30/Y/P/8/LU
230 V without monitoring single lamps	20 m	711520 - OM/Z/20/X/P/N/LU	711580 - OM/Z/20/Y/P/N/LU
	30 m	722180 - OM/Z/30/X/P/N/LU	722130 - OM/Z/30/Y / P/N/LU

Dimension

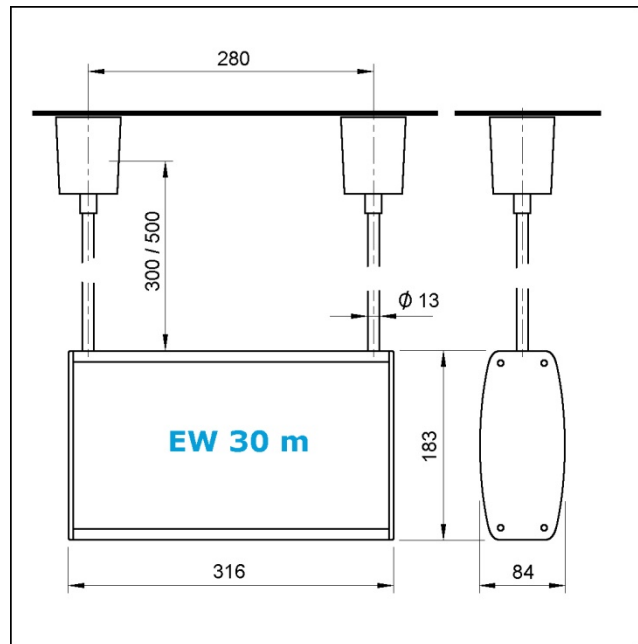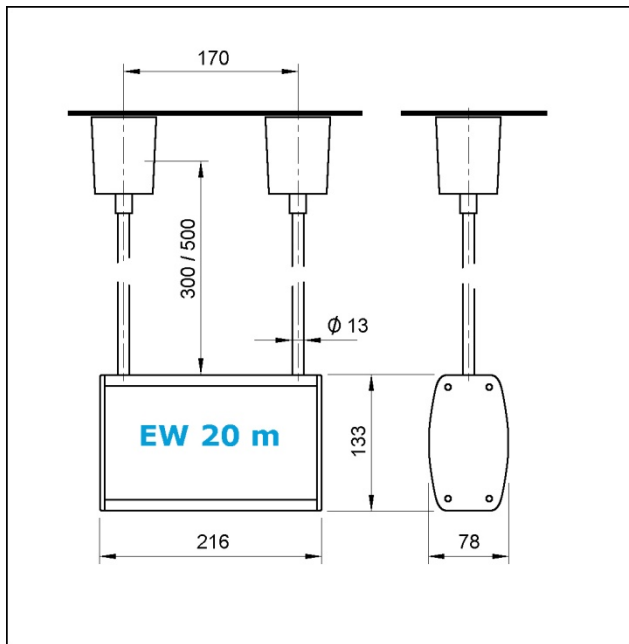

Installation

See document „Installation instruction Emergency exit sign lighting version OMEGA“.

Forchheim und Willing GmbH

Südstraße 21
09221 Neukirchen / Erzgebirge - Germany

Phone: 0049 371 27816-0
Fax: 0049 371 27816-29
E-Mail: info@forchheim-willing.de
Internet: www.forchheim-willing.de