

Emergency Exit Sign Lighting

Version „OMEGA“



Emergency Exit Sign Lighting Version „OMEGA“

**Surface mounted lamp
Central battery system**

Recognition distance:

- **20 m**
- **30 m**



Specification

Version	OMEGA		
Recognition distance	20 m / 30 m		
Mounting	Surface mounted		
Light source	2 x 3 W LED		
Power	24 V with monitoring single lamps	6,0 W	
	230 V with monitoring single lamps	8,0 VA	
	230 V without monitoring single lamps	7,1 VA	
Ambient temperature	-10 °C - +40 °C		
IP class	IP 30		
Protection class	I for 230 V		
	III for 24 V		
Housing	Aluminium profile, steel sheet coloured		
Weight	ca. 1,1 kg / 1,3 kg		
Maße (l x w x h) (20 m/30 m)	133 x 216 x 78 mm / 193 x 316 x 84 mm		
Pictogram	Pictogram set according to DIN 4844 (← / ↓ / →)		
Luminance	Limit of luminance of 500 cd/m ² according to DIN 4844-1 is clearly exceeded in		
	mains operation.		
	The luminance in emergency operation is higher than required by DIN EN 1838.		
Terminal	WAGO Lighting connector 2,5 mm ²		
Special option	Special pictograms optionally		

Order information

		X = Standard: Alu natural	Special colour: Y = RAL colour
24 V with monitoring single lamps	20 m	711710-OM/Z24/20/X/D/8/LU	711770 - OM/Z24/20/Y/D/LU
	30 m	722510-OM/Z24/30/X/D/8/LU	722560 - OM/Z24/30/Y/D/LU
230 V with monitoring single lamps	20 m	711610 - OM/Z/20/X/D/8/LU	711670 - OM/Z/20/Y /D/8/LU
	30 m	722360 - OM/Z/30/X/D/8/LU	722310 - OM/Z/30/Y/D/8/LU
230 V without monitoring single lamps	20 m	711510 - OM/Z/20/X/D/N/LU	711570 - OM/Z/20/Y /D/N/LU
	30 m	722160 -OM/Z/30/X/D/N/LU	722110 - OM/Z/30/Y/D/N/LU

Dimension

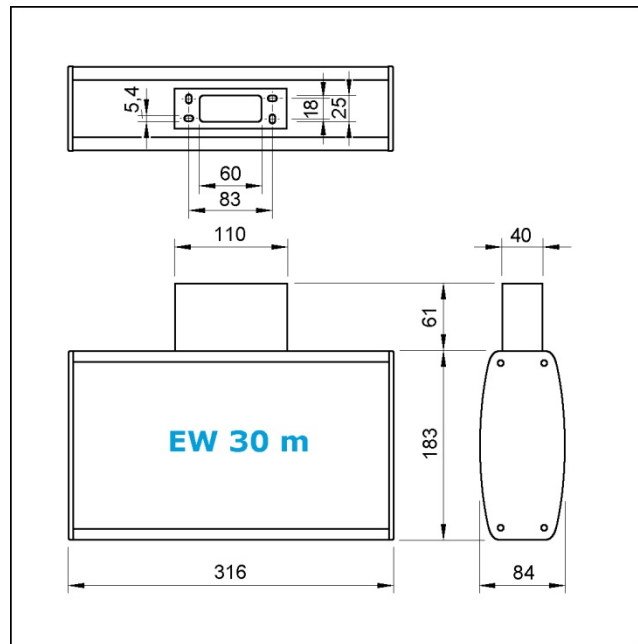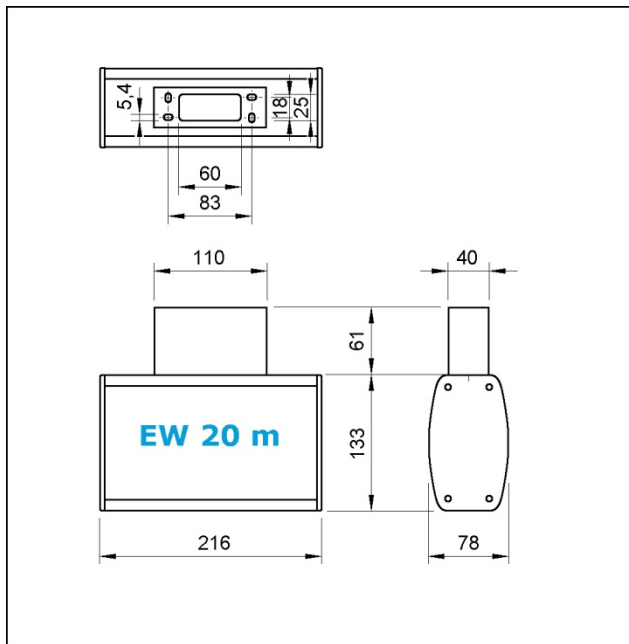

Installation

See document „Installation instruction Emergency exit sign lighting version OMEGA“.

Forchheim und Willing GmbH

Südstraße 21
09221 Neukirchen / Erzgebirge - Germany

Phone: 0049 371 27816-0
Fax: 0049 371 27816-29
E-Mail: info@forchheim-willing.de
Internet: www.forchheim-willing.de